




# CLASSIC IMPERIAL [gerflor.com](http://gerflor.com)





# CLASSIC IMPERIAL

 2 m	 608 x 608 mm 300 x 300 mm* (*only 2 mm)	34-43 2 mm	K5 2 mm	PUR 2 mm	23-31 1.5 mm	K3 1.5 mm	 100 % recyclable
--	--	---------------	------------	-------------	-----------------	--------------	--



① PUR surface treatment  
② Compacted, calendered floorcovering

- ▶ High performing homogeneous multipurpose flooring suitable for heavy traffic areas.
- ▶ Flexible homogeneous calendered compacted floorcovering available in tiles or sheets.
- ▶ PUR surface treatment: good foundation for routine maintenance and avoids the immediate use of an acrylic emulsion after installation.
- ▶ Directional design.
- ▶ Densely compacted surface for improved wear and ease of maintenance.
- ▶ Incorporates a fungistatic and bacteriostatic treatment.

-  Compact sheet without foam backing
-  Compact tile without foam backing
- ▲ 1.5 mm - 2 m x 20 lm  
WR: welding rod



**0103 White**  
WR: 0585 0807  
NCS: 1000




**0002 Platinum**  
WR: 0585 0304  
NCS: 2502-B



**0005 Steel**  
WR: 0585 0514  
NCS: 3502-B



**0013 Pewter**  
WR: 0585 0413  
NCS: 6005-R80B

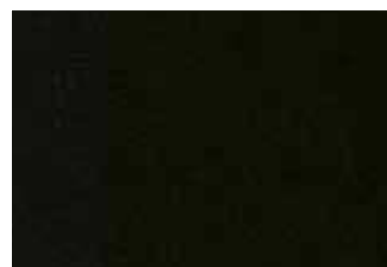

**0102 Black**  
WR: 0585 0675  
NCS: 9000



**0004 Clay**  
WR: 0585 0679  
NCS: 3020-Y50R



# CLASSIC IMPERIAL



**0016 Sand**  
WR: 0585 0501  
NCS: 1005-Y40R



**0003 Ivory**  
WR: 0585 0818  
NCS: 2010-Y30R



**0109 Sun**  
WR: 0585 0521  
NCS: 2040-Y20R



**0007 Crocus**  
WR: 0585 0702  
NCS: 3020-R70B



**0014 Brown**  
WR: 0585 0139  
NCS: 4010-Y50R



**0006 Honey**  
WR: 0585 0318  
NCS: 2010-Y40R



**0112 Storm**  
WR: 0585 0680  
NCS: 3020-B



**0015 Leaves**  
WR: 0585 0054  
NCS: 4010-B70G



**0004 Clay**  
WR: 0585 0679  
NCS: 3020-Y50R



**0010 Azure**  
WR: 0585 0805  
NCS: 3030-B



**0012 Mint**  
WR: 0585 0524  
NCS: 3020-B90G



**0018 Terra**  
WR: 0585 0574  
NCS: 3050-Y60R



**0019 Blue**  
WR: 0585 0562  
NCS: 4040-R90B



**0020 Forest**  
WR: 0585 0575  
NCS: 4040-B70G



**0017 Red**  
WR: 0585 0345  
NCS: 3050-Y90R



DESCRIPTION / <i>BESCHREIBUNG</i> / DESCRIPTION / <i>BESCHRIJVING</i> / DESCRIPCIÓN / <i>DESCRIÇÃO</i> / DESCRIZIONE			Classic Imperial 1.5 mm	Classic Imperial 2 mm	
	Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Essatura total</i> / Spessore totale	EN 428	mm	1.5	2.00
	ASTM F386-02	inch	0.06	0.08	
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN 430	g/sq.m	2520	3400	
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rol lengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli	EN 426	cm/lm	200 / 20	200 / 20	
	-	feet - inch	6'6" / 66"	6'6" / 66"	
Coverage / roll	-	sq.ft	430.56	430.56	
	-	sq.m	40	40	
Tile size / <i>Format Fliesen</i> / Format dalles / <i>Formaat der tegels</i> / Dimensiones de las losetas / <i>Dimensões dos mosaicos</i> / Dimensione delle piastre	EN 427	mm	-	300 x 300	608 x 608
Number of tiles per package / <i>Nombre de dalles par boîte</i> / Aantal tegels per doos / <i>Cantidad de losetas/caja</i> / Quantidade dos mosaicos/caixa / N° piastre per confezione	-	-	-	50	20
<b>CLASSIFICATION / <i>KLASSIFIZIERUNG</i> / CLASSIFICATION / <i>CLASSIFICATIE</i> / CLASIFICACIONES / <i>CLASSIFICAÇÕES</i> / CLASSIFICAZIONI</b>					
Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN 649	EN 649	
	ASTM F 1913-04	-	compliant	compliant	
European classification / <i>Europäische Klassifizierung</i> / Classement européen / <i>Europese classificatie</i> / Europea / <i>Europeia</i> / Europea	EN 685	class	23-31	34-43	
K rating / <i>Beanspruchungsklasse</i> / Classement K / <i>K classificatie</i> / Clasificación K / <i>Classificação K</i> / Classificazione K	-	class	K3	K5	
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	EN 13501-1	class	Bfl - s1	Bfl - s1	
	ASTM E648-08	class	-	class I	
	CAN/ULC S102.2	-	-	-	
Static electrical propensity / <i>Begehaufadung</i> / Potentiel de charge / <i>Elektrische eigenschappen</i> / Comportamiento electrostático / <i>Comportamento electrostático</i> / Resistenza elettrica	EN 1815	kV	< 2	< 2	
<b>PERFORMANCE / <i>TECHNISCHE EIGENSCHAFTEN</i> / PERFORMANCES / <i>TESTRESULTAAT</i> / CUALIDADES TÉCNICAS / <i>PERFORMANCES</i> / CARATTERISTICHE TECNICHE</b>					
Wear resistance / <i>Verschleißverhalten</i> / Résistance à l'usure / <i>Slijtvastheid</i> / Abrasión / <i>Abrasão</i> / Resistenza all'abrasione	EN 660.2	mm <sup>3</sup>	≤ 15.0	≤ 7.5	
Wear group / <i>Verschleißgruppe</i> / Groupe d'abrasion / <i>Groep slijtvasheid</i> / Grupo de abrasión / <i>Grupo de abrasão</i> / Gruppo di abrasione	EN 649	group	F	M	
Dimensional stability / <i>Maßstabilität</i> / Stabilité dimensionnelle / <i>Maatvastheid</i> / Estabilidad dimensional / <i>Estabilidade dimensional</i> / Stabilità dimensionale	EN 434	%	Sheet ≤ 0.40	Sheet ≤ 0.40 Tile ≤ 0.25	
Residual indentation / <i>Resteindruck</i> / Poinçonnement statique rémanent / <i>Indrukbelasting</i> / Punzonamiento / <i>Punçoamento</i> / Impronta	EN 433	mm	≈ 0.03	≈ 0.03	
Thermal conductivity / <i>Wärmeleitfähigkeit</i> / Conductivité thermique / <i>Thermische weerstand</i> / Resistencia térmica / <i>Resistência térmica</i> / Resistenza termica	EN 12 524	W/(m.K)	0.25	0.25	
Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 B02	degree	≥ 6	≥ 6	
Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN 423	class	OK	OK <i>beständig gegenüber Haushaltschemikalien und nicht färbenden, verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung</i>	
Fungistatic and bacteriostatic treatment / <i>Fungistatisch und bakteriostatisch</i> / Fongistatique et bactériostatique / <i>Bacteriologisch en schimmelwerend</i> / Bacteriostático y fungistático / <i>Bacteriostático e fungistático</i> / Batteriostatico e micostatico	-	-	OK	OK	
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie	-	-	PUR	PUR	
TVOC after 28 days / <i>TVOC (28 Tage)</i> / TVOC (28 jours) / <i>TVOC (28 dagen)</i> / TVOC (28 dias) / <i>TVOC (28 dias)</i> / TVOC (28 giorni)	ISO 16000-6	µg/m <sup>3</sup>	< 10	< 10	
<b>CE marking / <i>CE Kennzeichnung</i> / Marquage CE / <i>EG-conformiteitsmerk</i> / Marca de conformidad CE / <i>Marca de conformidade CE</i> / Marcatura CE di conformità</b>					
	EN 14041	-			
		-			

## INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

## MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available from Gerflor.



Health & Safety



ISO 14001



FIND GERFLOR ON YOUR SMART PHONE

<http://m.gerflor.com>



**Gerflor**  
the flooring group