

# TARALAY INITIAL

[gerflor.com](https://www.gerflor.com)



**Gerflor**<sup>®</sup>  
theflooringgroup





# TARALAY INITIAL



## High performance indentation / acoustic:

- Compact: 0,03mm / 6 dB
- Comfort: 0,10mm / 19 dB



## Easy maintenance:

Protecsol® Surface Treatment reduces cost and time of cleaning - no wax



**All references** are available in compact and comfort




## Comfort and Safety:

High Density foam backing for walking comfort and fall absorption







# TARALAY INITIAL

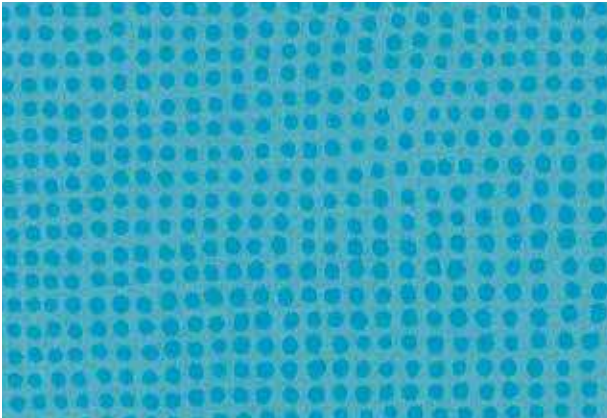

**0825 - Diversion Turquoise**  
NCS: 2050-B20G / LRV: 30.5

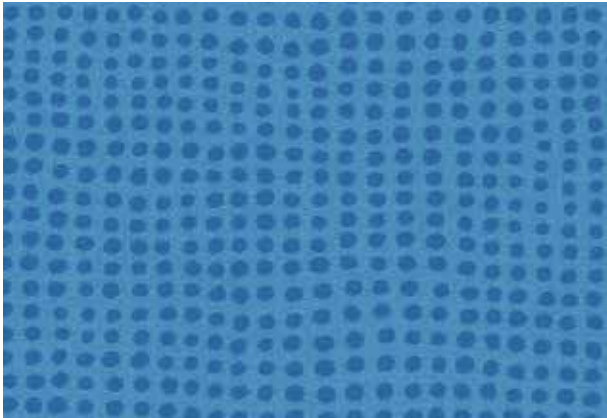


**0597 - Diversion Atlantique**  
NCS: 3050-R90B / LRV: 21.4

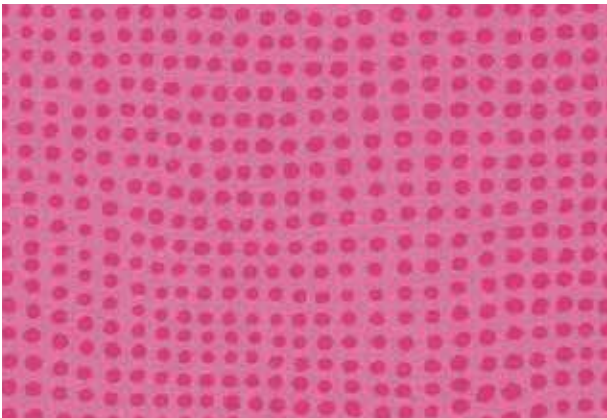

**0599 - Diversion Rose**  
NCS: 2050-R20B / LRV: 23.5



**0516 - Diversion Bordeaux**  
NCS: 4040-R20B / LRV: 10.8

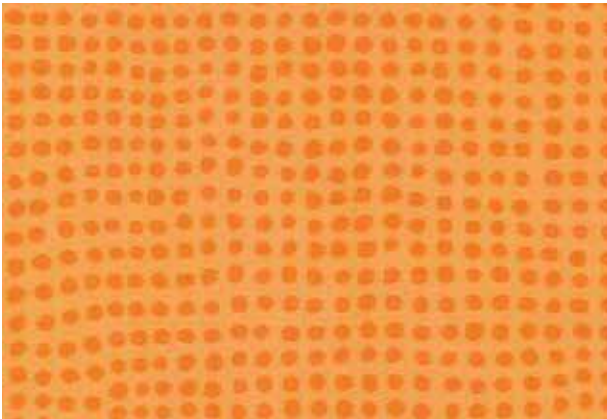

**0600 - Diversion Clementine**  
NCS: 1080-Y40 / LRV: 36.3



**0595 - Diversion Grenade**  
NCS: 2070-Y90R / LRV: 17



**0515 - Diversion Kiwi**  
NCS: 2050-G70Y / LRV: 45



**0596 - Diversion Mimosa**  
NCS: 1060-Y20R / LRV: 56.2




**0823 - Tweedy Beige**  
NCS: 3005-Y50R / LRV: 44.9



**0545 - Tweedy Natural**  
NCS: 2502-Y / LRV: 45.2



**0822 - Tweedy Taupe**  
NCS: 6005-Y20R / LRV: 17.5

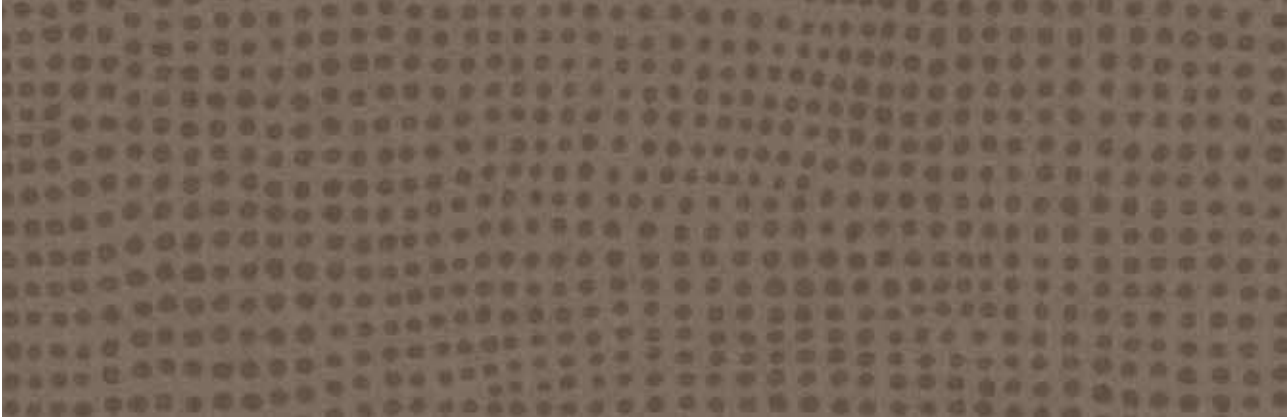

**0049 - Diversion Carbone**  
NCS: 6005-Y50R / LRV: 13.7



**0824 - Diversion Souris**  
NCS: 3502-B / LRV: 36.7



**0047 - Diversion Ivoire**  
NCS: 1502-Y / LRV: 60.7

# TARALAY INITIAL



No strip  
Continuous  
design

**0829 - Filament Cream**  
NCS: 2005-Y20R / LRV: 50.3



16.6 cm

**0797 - Habana Ivory**  
NCS: 2005-Y50R / LRV: 52.7



16.6 cm

**0828 - Habana Beige**  
NCS: 4010-Y30R / LRV: 35.8



16.6 cm

**0588 - Noma Clair**  
NCS: 3005-Y50R / LRV: 36.5

Comfort version 



  
No strip  
Continuous  
design

**0024 - Renzo** Chamois  
NCS: 3020-Y30R / LRV: 35

Compact version 



  
6.2 cm

**0779 - Ottawa** Poplar  
NCS: 2030 - Y30R / LRV: 40



  
10 cm

**0636 - Esterel** Blond  
NCS: 5030-Y40R / LRV: 25.6



  
16.6 cm

**0589 - Noma** Marron  
NCS: 5010 - Y50R / LRV: 22.1

# TARALAY INITIAL



No strip  
Continuous  
design

**0590 - Renzo Steel**  
NCS: 6500 / LRV: 14.5



No strip  
Continuous  
design

**0826 - Filament Grey**  
NCS: 3500-N / LRV: 39.4




10 cm



No strip  
Continuous  
design

**0518 - Esterel Chocolate**  
NCS: 6005-Y50R / LRV: 16.3

**0799 - Filament Light**  
NCS: 4005-Y20R / LRV: 31.7

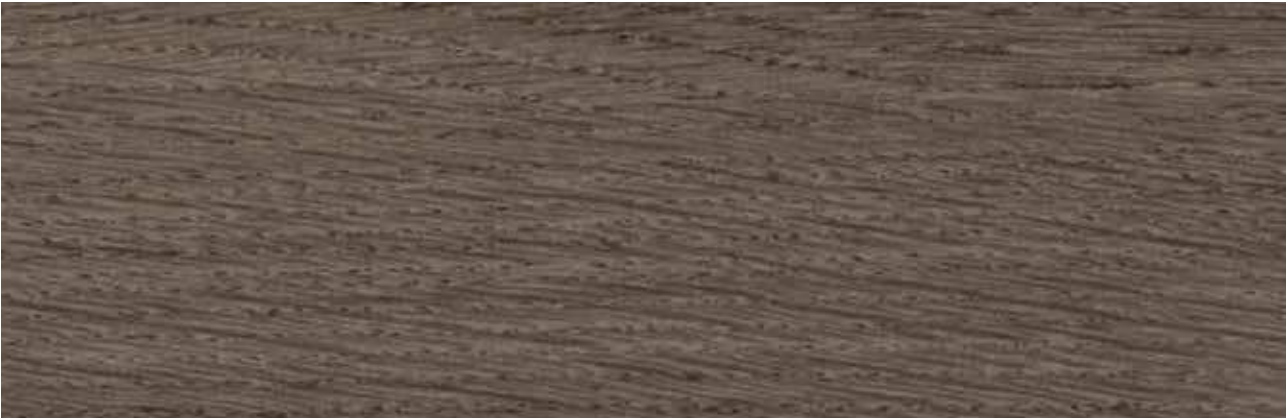


No strip  
Continuous  
design

**0069 - Renzo Noisette**  
NCS: 7010 - Y30R / LRV: 14.2



**0037 - Urban Souris**  
NCS: 3502-R / LRV: 34.8

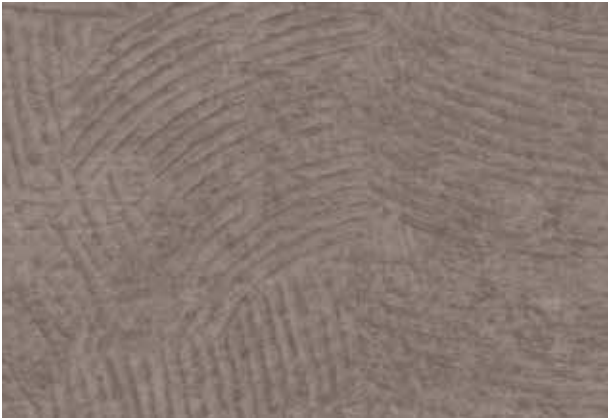


**0035 - Urban Gris**  
NCS: 5502-R / LRV: 24.1



**0465 - Strada Ciment**  
NCS: 4502-R / LRV: 25.7



**0791 - Strada Metallic**  
NCS: 5005-Y20R / LRV: 22.3

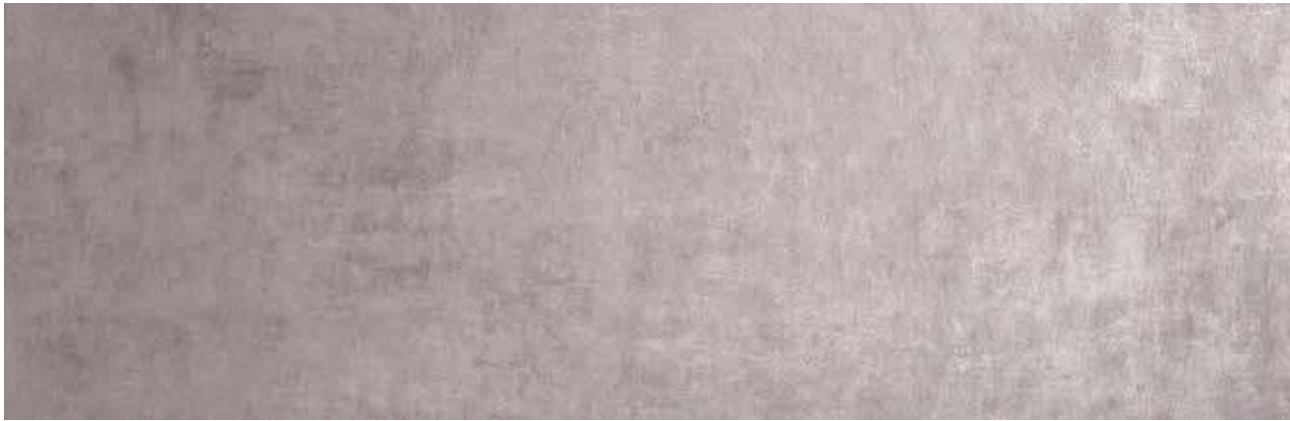

**0790 - Strada Chrome**  
NCS: 3500-N / LRV: 21.4

TARALAY INITIAL COMPACT PRO

TARALAY INITIAL COMFORT PRO

DESCRIPTION

|                       |                       |             |            |            |
|-----------------------|-----------------------|-------------|------------|------------|
| Total thickness       | EN ISO 24346 [EN 428] | mm          | 2.00       | 3.35       |
|                       | ASTM F386-02          | inch        | 0.08       | 0.13       |
| Wearlayer thickness   | EN ISO 24340 [EN 429] | mm          | 0.70       | 0.65       |
|                       | ASTM F410-02          | inch        | 0.028      | 0.026      |
| Weight                | EN ISO 23997 [EN 430] | g/sq.m      | 2635       | 2825       |
| Width/length of sheet | EN ISO 24341 [EN 426] | cm / lm     | 200 / 25   | 200 / 25   |
|                       | -                     | feet - inch | 6'6" / 82' | 6'6" / 82' |

CLASSIFICATION

|                                                        |                       |       |                       |         |
|--------------------------------------------------------|-----------------------|-------|-----------------------|---------|
| Norm/product specification                             | -                     | -     | EN ISO 10582 [EN 649] | EN 651  |
| European classification                                | EN ISO 10874 [EN 685] | class | 34 - 43               | 34 - 42 |
| Fire rating                                            | EN 13 501-1           | class | Bfl-s1                | Bfl-s1  |
| Static electrical propensity                           | EN 1815               | kV    | < 2                   | < 2     |
| Slip resistance wet: ramp test with oil <sup>[1]</sup> | DIN 51 130            | class | R10                   | R10     |

PERFORMANCES

|                                                                     |                         |         |                       |                       |
|---------------------------------------------------------------------|-------------------------|---------|-----------------------|-----------------------|
| Wear resistance                                                     | EN 660.2                | mm³     | ≤ 2.0                 | ≤ 2.0                 |
| Wear group                                                          | NF 189                  | group   | T                     | T                     |
| Type binder content                                                 | EN ISO 10582            | Type    | I                     | -                     |
| Dimensional stability                                               | EN ISO 23999 [EN 434]   | %       | ≤ 0.40                | ≤ 0.40                |
| Residual indentation (requirement)                                  | EN ISO 24343-1 [EN 433] | mm      | ≤ 0.10                | ≤ 0.20                |
| Residual indentation (average measured value)                       | -                       | mm      | ca. 0.03              | 0.10                  |
| Impact sound insulation                                             | EN ISO 717-2            | dB      | 6                     | 19                    |
| Castor chair test (type W)                                          | ISO 4918 [EN 425]       | -       | OK                    | OK                    |
| Thermal conductivity                                                | EN ISO 10456 [EN 12524] | W/(m.K) | 0.25                  | 0.25                  |
| Colour fastness                                                     | EN 20 105 - B02         | degree  | ≥ 6                   | ≥ 6                   |
| Surface treatment                                                   | -                       | -       | ProtecSol®            | ProtecSol®            |
| Chemical products resistance                                        | EN ISO 26987 [EN 423]   | -       | OK                    | OK                    |
| Anti-bacterial activity (E. coli - S. aureus - MRSA) <sup>[2]</sup> | ISO 22196               | -       | > 99% inhibits growth | > 99% inhibits growth |

ENVIRONMENT / INDOOR QUALITY AIR

|                    |             |       |             |             |
|--------------------|-------------|-------|-------------|-------------|
| TVOC after 28 days | ISO 16000-6 | µg/m³ | < 10        | < 10        |
| Certification      | -           | -     | Floorscore® | Floorscore® |

CE marking

|    |          |   |                                                                                       |                                                                                       |
|----|----------|---|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| CE | EN 14041 | - |   |  |
|    |          | - |  |  |

[1] For lifetime sustainable wet resistance, please refer to Tarasafe ranges  
[2] The implementation of an effective cleaning regime is the best defence against infection

**IMPORTANT:** The information contained in this document is valid from 01/09/2017 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

TARALAY INITIAL, LESS SPEAKING FOR MORE ACTIONS



**COMPOSITION**  
100% REACH



**INDOOR AIR QUALITY**  
100 times lower than norms requirements  
(TVOC < 10 ug/m³ after 28 days)



**RECYCLABILITY**  
100%



**LCA**  
Eco-designed according to a product specific life cycle analysis



**WELLNESS**  
Anti slip R10  
Comfort version : Walking comfort < 65 dB (best certification) and impact sound insulation - 19dB



Be connected!



#Gerflor



www.gerflor.com